



KLEEN+ RHT120

KLEEN+ RHT120 Base Oil is part of our advanced base oil line redefining quality and sustainability in the industry. Our premium KLEEN+ RHT120 base oil now delivers best-in-class API Group II+ base oil performance for reduced formulating costs and premium finished fluid quality. KLEEN+ RHT120 is a high viscosity index base oil which delivers top tier cold temperature performance, low volatility, and premium oxidation performance.

KLEEN+ RHT120 base oil is manufactured at multiple state-of-the-art re-refineries across the US and Canada resulting in improved reliability, increased security, and continuity of supply. The base oil production at all our sites undergo a battery of tests and pass stringent quality controls to ensure that base oils produced using our proprietary processes do not need corrector fluids.

KLEEN+ RHT120 base oil is certified for a wide range of approvals including API, ILSAC, and major industrial and OEM manufacturers. It is relied on by those marketing and producing private label lubricants, by many of the majors, and for our own use in the production of performance Automotive, Heavy Duty, and Industrial lubricants. Simply put, KLEEN+ base oils allow users to redirect their focus on optimizing additive packages to meet desired performance objectives rather than having any concerns about **reliability, quality, or sustainability**.


KLEEN+ RHT120 Applications

| | | | | |
|----------------------|------------------|---------------------------|--------------------|-------------------------------|
| Viscosity Modifiers | Hydraulic Fluids | Passenger Car Engine Oils | Racing Engine Oils | 2-Cycle Oils |
| Additive Diluent Oil | Process Oils | Way Oils | Motorcycle Oils | Automatic Transmission Fluids |

KLEEN+ Performance

KLEEN+ RHT120 Balance

KLEEN+ RHT120 base oil provides the optimum balance between volatility and cold temperature performance to minimize emissions, maintain fuel economy, reduce deposits, reduce wear, reduce oil burn off and thickening, and reduce mist in higher temperature industrial applications.

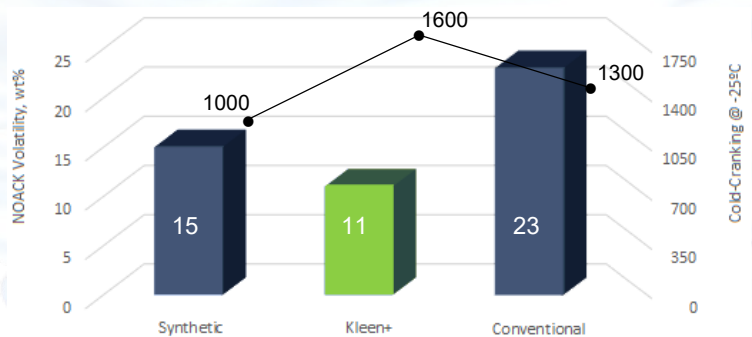



KLEEN+ RHT120

Typical Properties

| KLEEN+ | Test Method | RHT120 |
|--|--------------------------|----------------|
| Kinematic Viscosity cSt @ 40°C cSt @ 100°C | ASTM D7279 ASTM D7279 | 24.7 4.8 |
| Viscosity Index | ASTM D2270 | 117 |
| Color | ASTM D1500 | L 0.5 |
| Appearance | Visual | Clear & Bright |
| Specific Gravity @ 15°C (60°F) | ASTM D4052 | 0.844 |
| Flash Point, °C | ASTM D92 | 224 |
| Pour Point, °C | ASTM D5949 | -18 |
| Cold-Cranking Simulator @ -25°C, cP | ASTM D5293 | 1550 |
| Evaporative Loss, NOACK, wt% | ASTM D5800 | 12.5 |
| Sulfur, µg/g | ASTM D5185 | < 50 |

Note: Values shown above are representative of current production and may vary within modest ranges.

New Baseline in Base Oils

Reliability: KLEEN+ base oils are built on the foundation that superior base oils produce superior finished goods, so we start with a better feedstock to produce a better base oil. As the largest provider of re-refined base oil in North America, the Automotive, Heavy Duty, and Industrial sectors requiring high-quality Group II and Group II+ paraffinic base oil rely on the quality, security, and advantages.

Quality: KLEEN+ base oils redefine quality due to the feedstock and our proprietary refining processes to deliver base oils which best the competition. Our KLEEN+ base oils are tested, proven and trusted. Companies rely on our quality and performance KLEEN+ base oils that are superior to Group II base oils derived from crude. No other company can match our top-quality Group II+ base oil.

Sustainability: Using KLEEN+ base oils means less reliance on natural resources. It's better for the environment, plays a significant role in sustainability efforts, and it is better for the bottom line.